


D & S Supplies

Gate selection and frame specifications

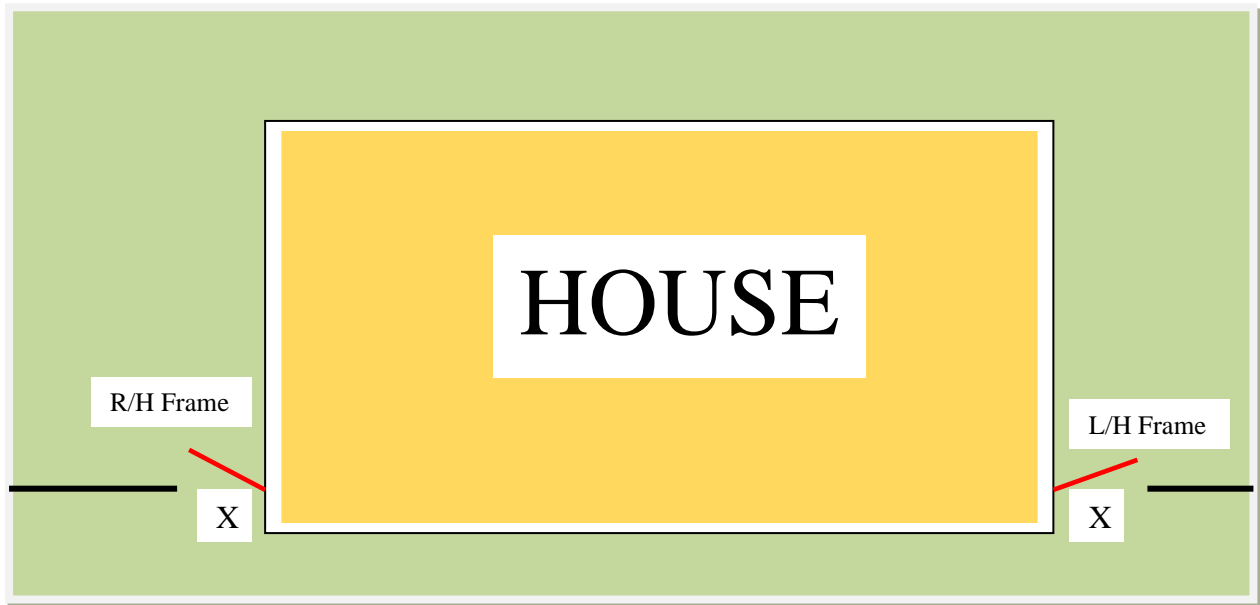

Gate stencils.

L/H = left hand hinge

R/H = right hand hinge

Double = piece of a double set of frames. Please ensure you get a left and right piece.

How to determine whether your gate is a L/H or R/H frame.

Imagine the gate has been installed. Now standing so the gate swings away from you - which side is the gate hinged? This will indicate your selection – if the gate is hinged on the left you will require a L/H frame. Look at the example picture above (the gate is represented in red simulating being hinged to the house). Gates usually swing into the property as pictured. You are represented by 'X'.

* If however you want the gate to swing out, use the same process positioning yourself again with the gate swinging away from you. If in that position the gate would be hinged on the right then you need a R/H frame.

Which height frame do I want?

There are three standard height frames and all are suitable for vertical palings.

Frames marked as 1200 suite 1200mm palings. The frame itself is 950mm high. This allows for 125mm overhang of palings top and bottom of the frame.

D & S Supplies

Gate selection and frame specifications

Frames marked as 1500 suite 1500mm palings. The frame itself is 1250mm high. This allows for 125mm overhang of palings top and bottom of the frame.

Frames marked as 1800 suite 1800mm palings. The frame itself is 1550mm high. This allows for 125mm overhang of palings top and bottom of the frame.

* Odd height frames, and frames suitable for horizontally fitted palings can be ordered. Orders take approximately five working days to be supplied. Drawings with measurements must be supplied with every order.

What width do the gates fit?

Standard single gates fit a 1000mm opening. The measurement between posts must be 1000mm to allow for the hinges and D-Latch and Striker supplied. The frames are 955mm across.

Standard double gates fit a 3000mm opening. The measurement between posts must be 3000mm to allow for the hinges and D-Latch and Striker supplied. There is also a lockable drop bolt supplied with all double gate frame sets. Each frame is 1465mm across.

* Odd size frames, and frames suitable for horizontally fitted palings can be ordered. Orders take approximately five working days to be supplied. Drawings with measurements must be supplied with every order.

D & S Supplies Pty Ltd atf

Welding, Fabrication, Fitting, Installation, General Construction & Maintenance

Mobile: 0419 717 090

Email: info@dandssupplies.com.au